


DIMPLE CHANNEL GRATING

(178mm) Wide

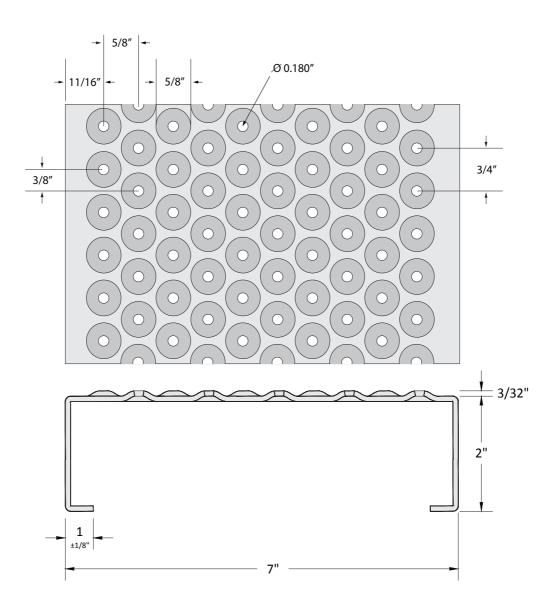

ACCEPTABLE LOADING FOR CLEAR SPAN: UNIFORM/CONCENTRATED (LBS)									
WIDTH	DEPTH	ALLOY	GAUGE	24" SPAN	36"SPAN	48"SPAN	60"SPAN	72"SPAN	
7"	2.0"	Galv.	11ga	2084/1405	1235/1061	651/746	400/689	322/527	
		Alum.	0.125ga	727/490	431/370	227/260	139/173	112/116	


Loads and deflections are theoretical and based on static loading.



DIMPLE CHANNEL GRATING



(254mm) Wide

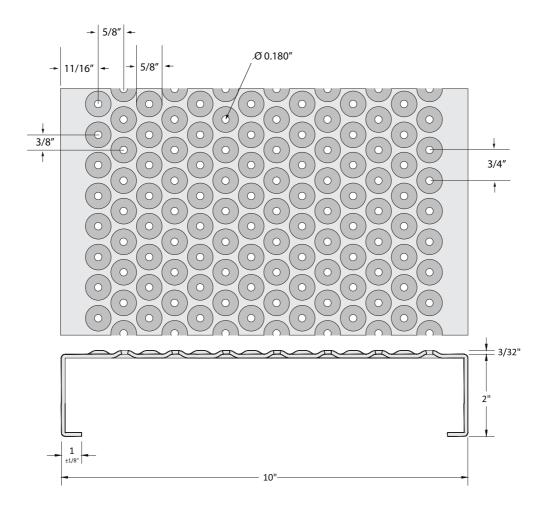

ACCEPTABLE LOADING FOR CLEAR SPAN: UNIFORM/CONCENTRATED (LBS)									
WIDTH	DEPTH	ALLOY	GAUGE	24" SPAN	36"SPAN	48"SPAN	60"SPAN	72"SPAN	
10"	2.0"	Galv.	11ga	1605/1554	951/1174	502/826	308/551	248/367	
		Alum.	0.125ga	560/542	332/409	175/288	107/192	86/128	


Loads and deflections are theoretical and based on static loading.





DIMPLE CHANNEL GRATING

12"
(305mm) Wide

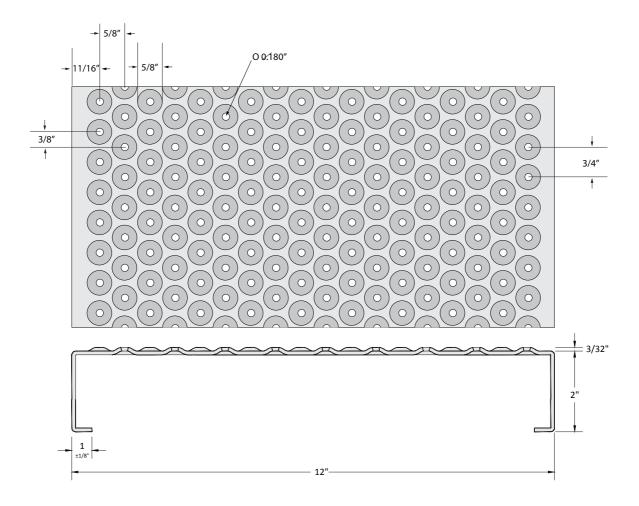

ACCEPTABLE LOADING FOR CLEAR SPAN: UNIFORM/CONCENTRATED (LBS)								
WIDTH	DEPTH	ALLOY	GAUGE	24" SPAN	36"SPAN	48"SPAN	60"SPAN	72"SPAN
12"	2.0"	Galv.	11ga	1395/1624	827/1227	436/863	268/575	215/384
		Alum.	0.125ga	487/566	288/428	152/301	93/201	75/134

Loads and deflections are theoretical and based on static loading.

